


LANOX 1076

Octadecyl 3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionate

CAS No. 2082-79-3

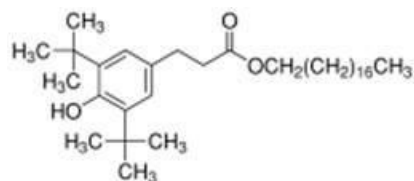

Specifications:

Item	Specification
Appearance	White Powder
Assay	≥98.0%
Volatile	≤0.10%
Transmittance	425nm ≥97.0% 500nm ≥98.0%
Melting point	50~55°C
Ash	≤0.10%

Package: 20Kg Carton

Application:

LANOX 1076, with good synergistic of LANOX 168, DLTDP, can retard heated degradation and oxidative degradation of polymer substances during processing and in end application. It can be widely used for PE, PP, POM, ABS resin and other compound resin, compound rubber and petrochemical products. The dosage is recommended to be 0.1~0.5%.

Storage: Keep container tightly closed in a dry and well-ventilated place.

Recommend Shelf Life: 12 months