


UV - 770

Light Stabilizer 770

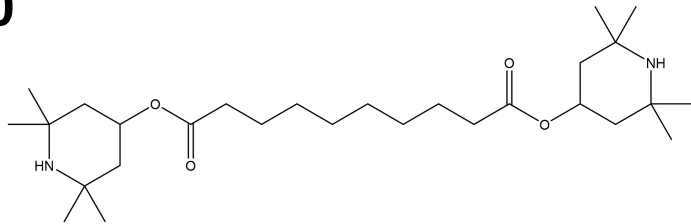

CAS No. 52829-07-9

Specifications:

Tests	Specification
Appearance	White powder or granule
Melting point	81-86°C
Volatile	≤0.50%
Transmittance	425nm ≥98.0% 500nm ≥99.0%
Content	≥99%
Ash	≤0.10%

Package: 25Kg Drum.

Application:

UV 770 is recommended to be used in polypropylene, impact modified PP (TPO), EPDM, polystyrene, impact polystyrene, ABS, SAN, ASA and polyurethanes and is also effective in polyamides and polyacetals.

Storage: UN 3077 9/PG 3.Store in dry places under 30°C avoiding moisture and heat.



Recommend Shelf Life: 12 months