


# UV 783

## Light stabilizer 783

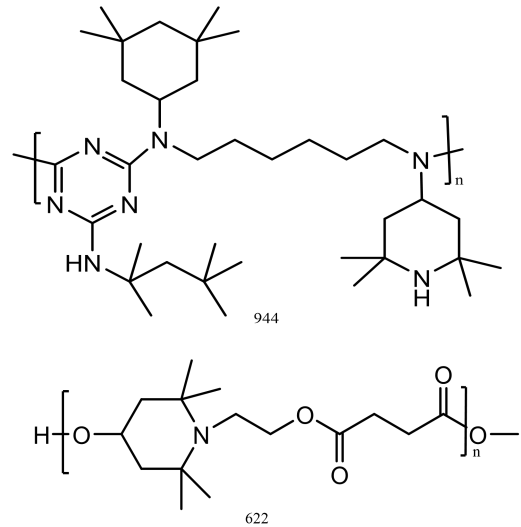

CAS No. 70624-18-9 (944) + 65447-77-0 (622)

### Specifications:

Tests	Specification
Appearance	White to light-yellow solid
Light transmittance	≥90% (425nm) ≥91.5% (450nm) ≥93% (500nm)
Chroma	≤120 APHA
Softening point	50-130°C
Loss on drying	≤0.5%
Ash	≤0.1%

**Package:** 25kg carton inner with plastic bag .

### Application:

- It is suitable for polyolefin materials, particularly effective in PP fiber, tape, thin or thick LLDPE, LDPE products
- It can effectively prolong product service life.

**Storage:** Keep container tightly closed in a dry and well-ventilated place.

**Recommend Shelf Life:** 12 months.