


YAC-S323

3-Mercaptopropyltriethoxy Silane

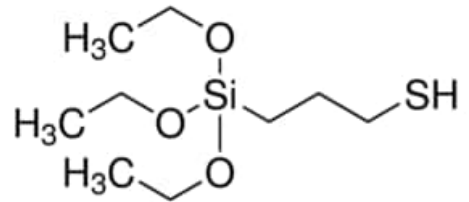

CAS No. 14814-09-6

Specifications:

Items	Specification
Appearance	Colorless transparent liquid
Assay	≥98.0%
Color	≤25APHA
Density [25°C]	1.000±0.0050g/cm ³
Refractive Index [25°C]	1.4410±0.0110

Package: 25Kg / 200Kg Drum or 1000Kg IBC

Application:

- YAC-S323 can improve the adhesion of polysulfide and polyurethane sealants to glass and metal surfaces.
- Improves low-rolling resistance in silica-reinforced tire tread compounds.
- Enhances properties in mineral-reinforced articles such as shoe soles, rubber goods.
- Suitable for use in polymer such as Butyl, Epoxy, Neoprene, Nitrile, Phenolic, Polysulfide, Polyurethane, Styrene Butadiene.

Storage: Store in a cool, dry place. Avoid sunshine and moisture.



Recommend Shelf Life: 12 months