


UV-326

2-(2-Hydroxy-3-tert-butyl-5-methylphenyl)-5-chlorobenzotriazole

CAS No. 3896-11-5

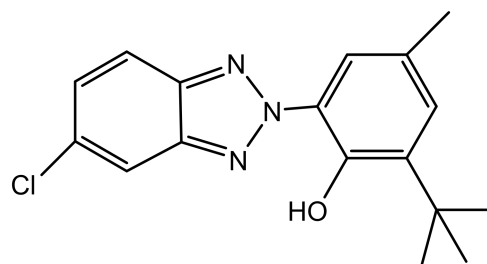

Specifications:

Tests	Specification
Appearance	Light yellow powder
Purity	≥99%
Light transmittance	≥93% (460nm)
	≥95% (500nm)
Melting point	137-142°C
Loss on drying	≤0.5%
Ash	≤0.1%

Package: 25Kg carton lined with plastic Bags.

Application:

- It is mainly used in polyvinyl chloride, polystyrene, unsaturated resin, polycarbonate, ABS resin, epoxy resin, etc.
- It is resistant to phenols and phosphite Oxidants are combined with HALS to optimize the outdoor performance of the product.

Storage: Keep the container tightly closed and stored in a dry, well-ventilated place.

Recommend Shelf Life: 12 months.