


LANSORB UV-328

UV Absorber 328

CAS No. 25973-55-1

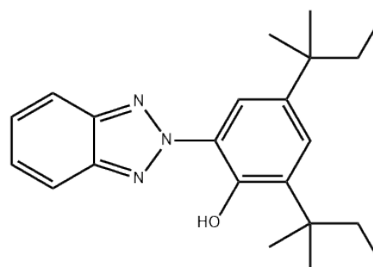

Specifications:

Tests	Specification
Appearance	Light yellow powder
Assay	≥99.0%
Melting point	79.0~87.0℃
Loss on drying	≤0.50%
Ash	≤0.10%
Light transmittance (460nm)	≥96.0%
Light transmittance (500nm)	≥97.0%

Package: 20Kg/Carton

Application:

- The product is mainly used in polyolefin, styrene monopolymer and copolymer, ABS, acrylic polymer, unsaturated polyester, thermoplastic polyurethane, polyacetal, PVB(polyvinyl butanal), epoxy and polyurethane two-component system. It can be used in combination with antioxidant and HALS to optimize the outdoor performance of products.

Storage: Keep container tightly closed in a dry and well-ventilated place.



Recommend Shelf Life: 12 months.