


UV-328

2-(2-Hydroxy-3,5-di-tert-pentylphenyl)-2H-benzotriazole

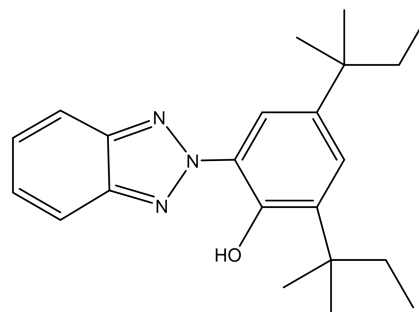

CAS No. 25973-55-1

Specifications:

Tests	Specification
Appearance	Light yellow powder
Assay	≥99.0%
Light transmittance	≥96% (460nm) ≥97% (500nm)
Melting point	79-87°C
Loss on drying	≤0.5%
Ash	≤0.1%

Package: 25Kg carton inner with plastic Bag.

Application:

- The product is mainly used in polyolefin, styrene monopolymer and copolymer, ABS, acrylic polymer, unsaturated polyester, thermoplastic polyurethane, polyacetal, PVB(polyvinyl butanal), epoxy and polyurethane two-component system. It can be used in combination with antioxidant and HALS to optimize the outdoor performance of products.

Storage: Keep container tightly closed in a dry and well-ventilated place.



Recommend Shelf Life: 12 months.