


YAC-V172

Vinyltris(2-methoxyethoxy)silane

CAS No. 1067-53-4

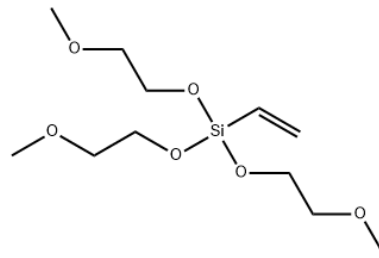

Specifications:

Tests	Specification
Appearance	Colorless transparent liquid
Assay	≥98%
Color (Pt-Co)	≤30
Refractive index (n _D ²⁵)	1.421~1.431

Package: 200Kg/Drum or 1000Kg/IBC

Application:

- It is used as coupling agent, adhesion promoters, crosslinking agent.
- It is used for sulfur and peroxide cured rubber, polyester, polyolefins, styrenics, and acrylics etc.
- It is used to copolymerize with ethylene for moisture induced coupling of polyethylene.
- It is used to graft to polyethylene for moisture induced coupling.
- It is used for surface treatment of mineral fillers in plastics.

Storage: Store in cool place. Keep container tightly closed in a dry and well-ventilated place.



Recommend Shelf Life: 12 months.