


LANSORB UV-326

UV Absorber 326

CAS No. 3896-11-5

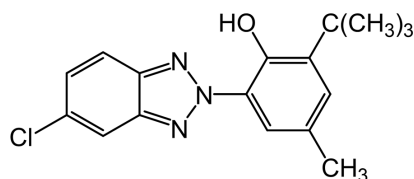

Specifications:

Tests	Specification
Appearance	Light-yellow powder
Assay	≥99.0%
Melting range	137.0~142.0℃
Light transmittance (460nm)	≥93.0%
Light transmittance (500nm)	≥95.0%
Loss on drying	≤0.50%
Ash	≤0.10%

Package: 20Kg/Carton or 25Kg/Carton

Application:

- The product is mainly used for polyvinyl chloride, polystyrene, unsaturated resin, polycarbonate, polymethyl methacrylate, polyethylene, ABS resin, epoxy resin etc. It can be used in combination with phenolic & phosphite antioxidants, and HALS to optimize performance in outdoor use.

Storage: Keep container tightly closed in a dry and well-ventilated place.

Recommend Shelf Life: 24 months.